

# VIETA PRO

## Goody 2 Speaker

Ref. VM-BS46



English



**LetMeRepair**

Spain

Have a problem  
with your product?

Contact us at:

Email: [vieta@letmerepair.es](mailto:vieta@letmerepair.es)

Phone: 952 179 479

Dear customer,

Thank you for purchasing the outdoor Bluetooth speaker **Goody 2** VM-BS46.

To ensure correct operation, please read this user manual carefully before operation.

# USER MANUAL



This product has been designed and developed under the professional standards of **VIETA PRO**, which was founded by the Brothers in 1954. Since then, Vieta has accumulated more than 60 years of history under the motto "The Avocation and Respect for Art of Music ", which has motivated all his projects, thus achieving a privileged and a privileged place in the electronics market based on constant effort and generous doses of passion.

The **VIETA PRO** models are based on the benefits of professional sound, where the standards of quality, durability, and sonority are above the commercial products of consumer electronics. Developed by the prestigious engineer "Jordi Hernández", with more than 40 years of experience in the electronics field and who has been designated as "expert hearing of vieta" since 2002. These models have been built with the most precise components for the purpose of being able to offer and develop the purity and uniqueness that characterizes the **VIETA PRO** sound.

## Important Safety Instructions

- Do not use the speaker in special cold and hot environments.
- Please avoid the speaker dropping or hitting with a hard object, it may cause other hardware damage.
- Take care when charging the speaker, excessive prolonged charging will damage the battery lifetime. Charge the speaker to full capacity when using for the first time.
- When battery low, the indicator light will flash and voice prompt "battery low", please charge speaker in time.
- Always disconnect the unit from the mains power supply before connecting / disconnecting other devices or moving the unit.
- Unplug the unit from the mains power socket during a lightning storm.
- If does not use this speaker for long time, please charge at least once within one month, in order to prevent the lithium battery from causing and damaging because of excessive consumption.

## Technical Data

Bluetooth Version: ACT2819 V5.0

Speaker Output: 25 W (12,5 W x 2)

Impedance: 4Ω

Speaker Driver: 45mm x 2 + passive radiator x 2

Aux In: 3,5mm

Waterproof Level: IPX7

Frequency Response: 80Hz-20KHz

FM Frequency: 87.5MHz ~ 108MHz

SNR: >75dB

Built-in Battery: 7.4V 2500mAh

Input: DC 5V 2A

Power Bank Output: DC 5V 1A

Charging time: 3:30 hours

Working hours: 12 hours at 50% volume

Weight: 570g

Dimension: 190.8mm\*Φ73.6mm

## Featurest

- Bluetooth Music and Mobile Hands-free Function  
Bluetooth 5.0 stereo music playing, support mobile hands-free function.
- Support TWS Function  
True Wireless Stereo (two same speakers can be paired and play music at the same time)
- Aux-in  
Work as the external speaker by connecting to the audio source of computer, mobile, PSP/MP3/MP4 etc.
- USB Flash Disk Music playing  
Support MP3/WAV/WMA music format, capacity up to 32G
- FM Radio  
With built-in antenna for better signal reception.
- Voice guide  
The speaker will prompt the working mode and status for easy operation.

- Voice Assistant


Experience a smart lifestyle on the speaker via the mobile's voice assistance.

- Water-resistance at IPX7
- Two passive radiators with the ambient lighting;
- With Type C Charging Jack
- Power bank function

## Package Contents

Bluetooth Speaker, Type C USB Cable, Aux in Cable, User Manual

## Slot and buttons

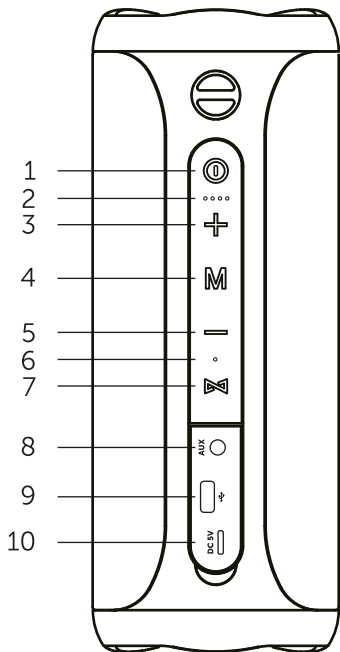

- Ⓞ 1. Power button; Play/Pause/- Mute button
- ⋯ 2. Battery indicator
- ⊕ 3. Volume+ / Forward
- M 4. Mode button / Voice assistant button
- ⊖ 5. Volume- / Backward
- 6. Working status indicator
- ⌘ 7. TWS Button
- AUX ○ 8. Aux in jack
- ⊞ 9. USB flash disk port / Power bank output port
- DC 5V 10. Type C DC 5V charging jack


## Features

### 1. Power on/off

Long press  button and hold for 2 seconds to power on/off the speaker.

Each time to power on the speaker, the speaker volume will be under 30%.The default working mode is Bluetooth mode.


### 2. Bluetooth

1) Power on the speaker and enter to Bluetooth mode, or you can short press the  button to switch to the Bluetooth mode. The Working status indicator light will twinkle in green.


2) Turn on the Bluetooth of your phone, search for nearby devices. The **Vieta Pro Goody 2** will be found on your mobile pairing list, please connect it. When connected, the speaker will prompt "Connected" and the operation indicator will stop twinkling and turns to solid green.





3) Turn on the mobile or other devices' music player, the speaker will play the selected music

4) The speaker will pair with the latest used Bluetooth device automatically when devices are in the pairing range. Long press the  button to disconnect the current Bluetooth connection.


### **3. Mobile Hands-free phone calls(Under Bluetooth Mode)**



Short press the  button to answer/hand off the phone call.


Short press  or  button to switch the call between the speaker and the phone.

### **4. TWS(True Wireless Stereo) function (only works in Bluetooth and Aux In mode)**

a) Power on 2pcs **Goody 2** (ensure both speakers are in Bluetooth waiting to pair status).

b) Short press the  button on either one speaker (only one speaker, no need pressing two speakers)to enter the TWS pairing mode. The indicator light will flash in orange and green color alternately.

- c) Once two speakers paired. The speaker you press, which operation indicator flashing in green is the master speaker. The other one in solid orange is the slave speaker.
- d) Use your phone to pair the master speaker **Goody 2** via Bluetooth, and play music on both speakers.
- e) TWS function also works at AUX-in mode, please make the TWS pairing first, then plug in the included 3.5mm Aux cable into master speaker(Please note: the Aux In cable need to insert into the master speaker). The master speaker will be switched to AUX In mode automatically.
- f) Short press the  button on either one speaker to disconnect the TWS pairing. Long press the  button to clear the TWS pairing memory.

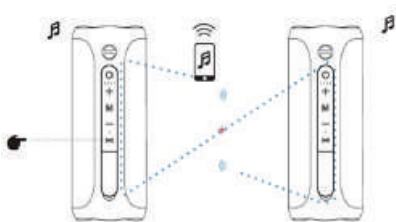

## 5. USB Music Playing

Inserting the USB disk into the speaker. Short press the **M** button to enter the USB mode , the speaker will prompt "USB Mode". Then the speaker will play the USB music directly. The max USB capacity upto 32G and support the MP3/WMA/WAV music format.

## 6. FM Radio

Press the button **M** to set the Radio FM mode (the vocal guidance of the speaker will show "FM Radio mode").

In FM mode, press and hold **M** in order to generate the automatic search and automatically save FM radio stations.

**Note:** in order to get a good experience when using FM function. We suggest auto scan and save the radio FM stations when using in the new environment.

## 7. Aux in Mode

Use the 3.5mm audio cable included to connect the speaker to an audio source (PC, MP3/MP4, mobile phone). the speaker will prompt "Aux in mode". The speaker will play the music from the audio source.






**Please note:** Track switch button of speaker does not work under Aux in mode, you can only switch sound track from audio source device.

## 8. Calling out the mobile's voice assistant


Under Bluetooth pairing status, long press and hold the **M** button for 2 seconds to call out the mobile's voice assistant function on the speaker.

**Please Note:** Due to the different compatibility on different brand's android system, the experience will be different.

## Bluetooth / USB / FM / Aux In functions

	Long press to power on/off the speaker; Short press to play/pause/mute
	Short press for next track/Channel Long press to increase the volume Double short press to switch to the next folder of the USB music playing
	Short press to change the working mode Long press to calling out the mobile's voice assistant
	Short press for previous track/Channel Long press to decrease the volume Double short press to switch to the previous folder of the USB music playing
	Short press to enter/exit the TWS function Long press to clear the TWS/Bluetooth pairing memory

## 10. Light theme

Double short press the  button can change / turn on / turn off the light theme on the passive radiator.

There are three light themes: Breathing candle light---Gradient changing light---music rhythm light.



## 11. Power Bank Function

Please connect the speaker's USB slot to the digital devices' charging jack via the USB cable. speaker can charge these digital device, with voltage at 5V, max output current at 1A.

## 12. Intelligent power saving function

The speaker will be automatically powered off in below cases:

(1) Under Bluetooth mode, the speaker is waiting to pair for more than 20 minutes

(2) Under USB mode / FM mode / Aux In mode, if press the ▷ button to pause/mute for more than 20minutes.

**Note:** Please long press Ⓞ button again to power on the speaker

### 13. Charging

When speaker with low battery capacity, the speaker will prompt "battery low", and the volume will be automatically reduce to 60% .Please charge the battery via included USB cable immediately. During charging, the power indicator will keep flashing. When fully charged, the power indicator will stay in solid.

**Note:**

Please use the good quality adaptor to charge the speaker. We suggest use the adaptor specification at 5V/2A  
When speaker with low battery capacity, please charge the speaker immediately

## 14. Troubleshooting

<b>Problem</b>	<b>Solution</b>
No Power	Recharge
Can not charging	Change another USB cable to charge it, after change the USB cable have same problem, you can connect our service team to solve it.
No Sound	Adjust the volume on the connected device. Make sure that your Bluetooth device is within the effective operational range.
Cannot find the pairing ID "VM-BS46" on the Bluetooth device	Ensure the Bluetooth function is activated on your Bluetooth device. Make sure that your Bluetooth device is within the effective operational range.



## Declaration of conformity

Issuer's name: FRAMASON AUDIO S.A

Address: Av. de Pau Casals 7, Entresuelo 2- 08021 Barcelona (España)

Tel: +34 93 1162491

CIF: A62829841

We declare under our own exclusive responsibility that the product:

- Description: True Wireless Speaker
- Brand: Vieta Pro
- Model: VM-BS46
- Manufacturer: FRAMASON AUDIO S.A
- Manufacturing country: China

referred to in this declaration is in compliance with the essential norms and standards

EN 62368-1:2014 + A11:2017

EN 301 489-1 V2.2.0 (2017-03)

EN 301 469-17 V3.2.0 (2017-03)

EN 55032:2015

EN 55035:2017

EN 300 328 V2.2.0 (2017-11)

EN 303 345 V1.1.7 (2017-03)

EN 62311:2008

in conformity with the provisions of the Directive 2014/53/EU of the European Parliament and of the Council of 16th April 2014.

Barcelona 1 Marzo de 2019

Carlos Alberdi  
Product Manager



**VIETA  
PRO**

[www.vietapro.com](http://www.vietapro.com)